

where the function  $E(t_n, \theta, \psi)$  is determined from a recurrence equation in [2].

*Proof:* Follows from an application of dynamic programming techniques.

Examination of these two feedback control laws reveals that the first is the continuous-discrete version of the continuous results presented in [1] and [11] originally derived using dynamic programming techniques, while the second is the continuous-discrete version of results in [6] derived using maximum principle techniques. It can be shown, by taking appropriate limits as the sampling period goes to zero, [2] that both of these forms of the optimal control law can be obtained by dynamic programming techniques using the two different state representations given above. This indicates that the appearance of the two different, but equivalent forms of the control laws are a consequence of the choice of the state rather than the optimization method.

REFERENCES

- [1] Y. Alekal, P. Brunovsky, D. H. Chyung, and E. B. Lee, "The quadratic problem for systems with time delay," *IEEE Trans. Automat. Contr.*, vol. AC-16, pp. 673-687, 1971.
- [2] R. Alford, "Optimal estimation and control of sampled data hereditary systems," Ph.D. dissertation, University of Minnesota, Minneapolis, 1984.
- [3] W. B. Arthur, "Control of linear processes with distributed lags using dynamic programming from first principles," *J. Opt. Theory Appl.*, vol. 23, pp. 429-443, 1977.
- [4] M. Delfour, E. B. Lee, and A. Manitius, "F-reduction of the operator Riccati equation for hereditary differential systems," *Automatica*, vol. 14, pp. 385-395, 1978.
- [5] P. Dorato and A. H. Levis, "Optimal linear regulators: The discrete-time case," *IEEE Trans. Automat. Contr.*, vol. AC-16, pp. 613-620, 1971.
- [6] H. N. Koivo and E. B. Lee, "Controller synthesis for linear systems with retarded state and control variables and quadratic cost," *Automatica*, vol. 8, pp. 203-208, 1972.
- [7] E. B. Lee, "Generalized quadratic optimal controllers for linear hereditary systems," *IEEE Trans. Automat. Contr.*, vol. AC-25, pp. 528-531, 1980.
- [8] A. Manitius, "Optimal control of hereditary systems," in *Control Theory and Topics in Functional Analysis*, Vol. II. Vienna: Int. Atomic Energy Agency, 1976, pp. 43-178.
- [9] S. Pohjolainen, "On the discrete-time quadratic optimum control problem in reflexive Banach space," in *Proc. 2nd Symp. Control Distributed Parameter Syst.*, Coventry, 1977, Section VII, 40-1, 40-9.
- [10] K. M. Przytowski, "Infinite-dimensional discrete-time equations as models for linear systems with time delay," in *Proc. 2nd Symp. Contr. Distributed Parameter Syst.*, Coventry, 1977, Section V, 30-1, 30-9.
- [11] W. H. Ray, *Advanced Process Control*. New York: McGraw-Hill, 1981.
- [12] A. Thowsen and W. R. Perkins, "On the controllability of linear time-delay systems with piecewise constant inputs," *Int. J. Syst. Sci.*, vol. 7, pp. 347-360, 1976.
- [13] R. B. Vinter and R. H. Kwong, "The infinite time quadratic control problem for linear systems with state and control delays: An evolution equation approach," *SIAM J. Contr. Optimiz.*, vol. 19, pp. 139-153, 1981.
- [14] J. Zabczyk, "Remarks on the control of discrete time distributed parameter systems," *SIAM J. Contr.*, vol. 4, pp. 721-731, 1974.

**On the Stabilization of Linear Neutral Delay-Differential Systems**

W.-S. LU, E. B. LEE, AND S. H. ŽAK

**Abstract**—Feedback-feedforward stabilizers for linear neutral delay-differential systems are proposed. Explicit conditions under which an adequate compensator yields a desired closed-loop characteristic polyno-

Manuscript received September 21, 1984; revised June 11, 1985. This work was supported in part by the National Science Foundation under Grant ECS 8217375 and in part by the School of Electrical Engineering, Purdue University.

W.-S. Lu is with the Department of Electrical Engineering, University of Victoria, Victoria, B.C., Canada VBW 2Y2.

E. B. Lee is with the Department of Electrical Engineering, University of Minnesota, Minneapolis, MN 55455.

S. H. Žak is with the School of Electrical Engineering, Purdue University, West Lafayette, IN 47907.

IEEE Log Number 8405757.

mal are given. The relation between realizability properties such as causality of the compensator and structural properties of the system are also described. An example is provided to illustrate the design technique.

I. INTRODUCTION

The control of linear delay-differential systems has been a subject of study for many years (see [1]-[6] among many others). This note is motivated by recent work of Byrnes, Spong, and Tarn [6] on feedback stabilization of linear neutral delay systems, and can be viewed as an extension of the results of Lu *et al.* [9]. We consider a single-input neutral system with finitely many noncommensurate delays modeled by

$$D(z)\dot{x}(t) = A(z)x(t) + b(z)u(t) \tag{1.1}$$

where  $z = (z_1, \dots, z_k)$  with delay operators  $z_i$ , i.e.,  $z_i x(t) = x(t - h_i)$ ,  $h_i > 0$ ,  $h_i$ 's are noncommensurate,  $A(z) \in \mathbb{R}^{n \times n}[z]$ ,  $D(z) \in \mathbb{R}^{n \times n}[z]$ , and  $b(z) \in \mathbb{R}^{n \times 1}[z]$ . Based on the generalized Bass-Gura formula given in [6], we show in this note how the requirements of the causality as well as the stability of a feedback stabilizer for system (1.1) lead naturally to two simple implementation schemes of such a compensator. Furthermore, in the case of commensurate delays (i.e.,  $k = 1$ ), a parameterization of all possible coefficient vectors associated with the characteristic polynomials of the closed-loop systems will be given in terms of a specific submodule in  $R_\delta^{1 \times n}$  defined in Section II.

II. NOTATION AND PRELIMINARIES

Notation of Byrnes *et al.* [6] will be utilized throughout the note. Let  $X_\delta = \{z = (z_1, \dots, z_k) \mid |z_i| \leq 1 + \delta, 1 \leq i \leq k\}$ . Define  $S_\delta \subseteq \mathbb{R}[z]$  by  $S_\delta = \{p(z) \in \mathbb{R}[z] \mid p(z) \neq 0 \text{ for } z \in X_\delta\}$  and let  $R_\delta$  denote the localization  $R_\delta := S_\delta^{-1}\mathbb{R}[z] = \{q(z)/p(z) \mid q \in \mathbb{R}[z], p \in S_\delta\}$ . Clearly  $R_\delta$  forms a ring under usual addition and multiplication. An element  $r = q/p \in R_\delta$  is a unit in  $R_\delta$  whenever  $q \in S_\delta$ , i.e.,  $r(z) \neq 0$  for  $z \in X_\delta$ . A matrix  $D(z) \in \mathbb{R}^{n \times n}[z]$  is said to be formally stable if  $\det D(z) \in S_\delta$  for some  $\delta > 0$ . Obviously formal stability of  $D(z)$  implies that  $D^{-1}(z) \in R_\delta^{n \times n}$ . The set  $R_\delta^{n \times n}$  forms a noncommutative ring under usual matrix addition and multiplication. An element  $U(z) \in R_\delta^{n \times n}$  is a unit whenever  $\det U$  is a unit in  $R_\delta$ .

In the rest of the note it is assumed that  $D(z)$  in (1.1) is formally stable. For such a system, we define the  $R_\delta$ -associated system as

$$\dot{x}(t) = F(z)x(t) + g(z)u(t) \tag{2.1}$$

where  $F(z) = D^{-1}(z)A(z) \in R_\delta^{n \times n}$ ,  $g(z) = D^{-1}(z)b(z) \in R_\delta^{n \times 1}$ . Define the reachability matrix of system (2.1) as

$$[F|g] \triangleq [g(z), F(z)g(z), \dots, F^{n-1}(z)g(z)]. \tag{2.2}$$

System  $(F, g)$  is said to be  $R_\delta$ -reachable if  $[F|g]$  is a unit in  $R_\delta^{n \times n}$ . Namely the  $R_\delta$ -reachability of  $(F, g)$  is equivalent to  $\det [F|g] \in S_\delta$ .

Let  $\mu[P]$  be the set of zeros of  $\det P(s)$  for a given square matrix  $P(s)$ . Notice [6] that

$$\mu[sD(e^{-sh}) - A(e^{-sh})] = \mu[D(e^{-sh})] \cup \mu[sI - F(e^{-sh})] \tag{2.3}$$

where  $e^{-sh} \equiv (e^{-sh_1}, \dots, e^{-sh_k})$ . Hence, the dynamical behavior of neutral system (1.1) can also be described by separately considering the sets  $\mu[D]$  and  $\mu[sI - F]$ . In other words, since  $D(z)$  in system (1.1) is assumed to be formally stable, (2.3) implies that a feedback compensator which stabilizes  $R_\delta$ -associated system (2.1) will also yield a stable closed-loop system associated with (1.1).

III. IMPLEMENTATION SCHEMES OF A FEEDBACK STABILIZER

Given single-input neutral system (1.1) with formally stable  $D$ -operator, and  $R_\delta$ -associated system (2.1), let

$$\det [sI - F(z)] = s^n + f_1(z)s^{n-1} + \dots + f_n(z), \quad f_i \in R_\delta, 1 \leq i \leq n.$$

Define

$$f(z) = [f_1(z), \dots, f_n(z)].$$

For any desired coefficient vector

$$\tilde{f}(z) = [\tilde{f}_1(z), \dots, \tilde{f}_n(z)], \quad \tilde{f}_i \in R_\delta, \quad 1 \leq i \leq n, \quad (3.1)$$

the state feedback controller

$$u(t) = -k(z)x(t) + v(t) \quad (3.2)$$

with

$$k(z) = (\tilde{f} - f)\Gamma^T[F|g]^{-1} \quad (3.3)$$

results in a closed-loop system whose characteristic polynomial  $\det [sI - F(z) + g(z)k(z)]$  is associated with the desired coefficient vector  $\tilde{f}(z)$ , where  $[F|g]$  is the reachability matrix of pair  $(F, g)$  and  $\Gamma$  is the inverse of the lower triangular Toeplitz matrix

$$\begin{bmatrix} 1 & & & & \\ f_1 & 1 & & & \\ \vdots & \vdots & \ddots & & \\ f_{n-1} & f_{n-2} & \dots & 1 & \end{bmatrix}$$

Expression (3.3) is known as the generalized Bass-Gura formula [6].  $R_\delta$ -associated system (2.1) is said to be arbitrarily coefficient-assignable by state feedback if, for any  $\tilde{f} \in R_\delta$ , there exists a state feedback (3.2) with  $k(z) \in R_\delta^{1 \times n}$  such that the resulting closed-loop system has coefficient vector  $\tilde{f}$  associated with its characteristic polynomial. By (3.3), system (2.1) is arbitrarily coefficient-assignable by a state feedback if and only if  $(F, g)$  is a  $R_\delta$ -reachable pair.

If we write now

$$(\tilde{f} - f)\Gamma^T[F|g]^{-1} = \begin{bmatrix} n_1(z) & \dots & n_n(z) \\ w_1(z) & \dots & w_n(z) \end{bmatrix} \text{ with } n_i(z), w_i(z) \in \mathbb{R}[z]$$

and define

$$w(z) = \text{least common multiple of } w_i(z), \quad 1 \leq i \leq n$$

then we have

$$k(z) = (\tilde{f} - f)\Gamma^T[F|g]^{-1} = w^{-1}(z)N(z) \text{ for some } N(z) \in \mathbb{R}^{1 \times n}[z]. \quad (3.4)$$

Clearly  $k(z)$  in (3.4) belongs to  $R_\delta^{1 \times n}$  if and only if

$$w(z) \in S_\delta. \quad (3.5)$$

Thus, we have the following.

**Proposition 1:** The coefficient vector associated with the closed-loop system can be assigned to be  $\tilde{f}(z) \in R_\delta^{1 \times n}$  by the feedback controller (3.2), (3.3) if and only if (3.5) holds.

Notice that condition (3.5) also implies that the feedback controller (3.2) with  $k(z)$  given by (3.4) is physically implementable. Since  $w(0) \neq 0$ , one may assume that

$$w(0) = 1 \quad (3.6)$$

without loss of generality. Combining (3.2) with (3.4) we get

$$u(t) = -N(z)x(t) + (1 - w(z))u(t) + w(z)u(t) \quad (3.7)$$

where term  $(1 - w(z))u(t)$  involves only data  $u(t-1)$ ,  $u(t-2)$ , etc. Now control law (3.7) can be implemented in a feedback-feedforward scheme as diagrammed in Fig. 1.

Furthermore, in the case of commensurate delays (i.e.,  $k = 1$ ) we can save delay elements in the controller implementation. We apply division algorithm to obtain

$$N(z) = M(z)w(z) + R(z)$$

where  $M(z)$  and  $R(z)$  are in  $\mathbb{R}^{1 \times n}[z]$ .

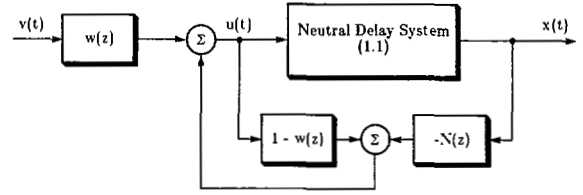


Fig. 1. Feedback-feedforward compensation scheme for neutral delay systems.

Hence,

$$u(t) = -M(z)x(t) + u_1(t), \quad (3.8)$$

where

$$u_1(t) = -R(z)x(t) + (1 - w(z))u_1(t) + w(z)u(t). \quad (3.9)$$

The combination of (3.8) and (3.9) yields an implementable scheme as diagrammed in Fig. 2 which may save delay elements as will be seen in the example in Section V.

#### IV. COMMENSURATE DELAY CASE: A PARAMETERIZATION OF THE ATTAINABLE SET OF COEFFICIENT VECTORS $\tilde{f}(z)$

In this section  $k = 1$  is always assumed.

Let

$$\Gamma^T[F|g]^{-1} = D^{-1}(z)N(z)$$

be an irreducible factorization of the matrix  $\Gamma^T[F|g]^{-1} \in \mathbb{R}^{n \times n}(z)$ , where  $D(z)$  and  $N(z)$  are  $n \times n$  polynomial matrices. The feedback gain  $k(z)$  in (3.3) can then be written as

$$k(z) = (\tilde{f} - f)D^{-1}(z)N(z).$$

Note that  $k(z)$  belongs to  $R_\delta^{1 \times n}$  if and only if there exists a polynomial  $w(z) \in S_\delta$  such that  $w(z)k(z) \in \mathbb{R}^{1 \times n}[z]$ , i.e.,

$$w(z)(\tilde{f} - f)D^{-1}(z)N(z) \in \mathbb{R}^{1 \times n}[z]. \quad (4.1)$$

Further, observe that (4.1) holds if and only if

$$w(z)(\tilde{f} - f) = h(z)D(z),$$

i.e.,

$$\tilde{f} = f + w^{-1}(z)h(z)D(z) \quad (4.2)$$

for some  $h(z) \in \mathbb{R}^{1 \times n}[z]$ , see [7, Lemma 6.6.-1] and [8]. Denoting the row vectors of  $D(z)$  by  $d_i(z)$  ( $i = 1, 2, \dots, n$ ), and observing that  $w^{-1}h \in R_\delta^{1 \times n}$  we can restate condition (4.2) in the following equivalent way.

**Proposition 2:** Given a single-input neutral system (1.1) with commensurate delays and with formally stable  $D$ -operator, the coefficient vector associated with  $\det [sI - F + gk]$  can be assigned to be  $\tilde{f}(z)$  by a feedback controller (3.2) with  $k(z) \in R_\delta^{1 \times n}$  if and only if

$$\tilde{f}(z) - f(z) \in \mathfrak{D}_\delta \quad (4.3)$$

where  $\mathfrak{D}_\delta$  is the submodule (in  $R_\delta^{1 \times n}$ ) spanned by  $\{d_i(z), 1 \leq i \leq n\}$ .

#### V. EXAMPLE

Consider the neutral system

$$-2\dot{x}_1(t) + \dot{x}_1(t-h) = 2x_1(t) - x_1(t-h) - 2x_2(t-h) + x_2(t-2h) + u(t-h),$$

$$-2\dot{x}_2(t) + \dot{x}_2(t-h) = 2x_1(t) - x_1(t-h) + 4x_2(t) - 2x_2(t-h) + u(t),$$

i.e.,

$$\begin{bmatrix} z-2 & 0 \\ 0 & z-2 \end{bmatrix} \dot{x}(t) = \begin{bmatrix} -(z-2) & z^2-2z \\ -(z-2) & 4-2z \end{bmatrix} x(t) + \begin{bmatrix} z \\ 1 \end{bmatrix} u(t). \quad (5.1)$$

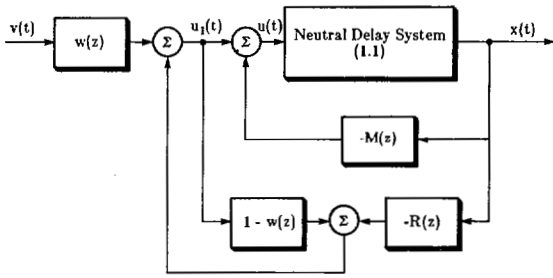


Fig. 2. Compensation scheme with the reduced number of delay lines in the controller.

The  $D$ -operator is formally stable and the  $R_\delta$ -associated pair is

$$(F, g) = \left( \begin{bmatrix} -1 & z \\ -1 & -z \end{bmatrix}, \begin{bmatrix} z \\ z-2 \\ 1 \\ z-2 \end{bmatrix} \right) \quad (5.2)$$

for which

$$[F|g] = \begin{bmatrix} z & 0 \\ z-2 & 0 \\ 1 & -z+2 \\ z-2 & -z+2 \end{bmatrix} \text{ and } \det [F|g] = -\frac{z(z+2)}{(z-2)^2}$$

Notice that  $\det [F|g]$  is not a unit in  $R_\delta$  so  $(F, g)$  is not  $R_\delta$ -reachable. Further, we compute

$$[F|g]^{-1} = -\frac{(z-2)^2}{z(z+2)} \begin{bmatrix} z+2 & 0 \\ 2-z & 0 \\ 1 & z \\ 2-z & z-2 \end{bmatrix}$$

and  $\det [sI - F(z)] = s^2 + 3s + (2 + z)$ .

Thus,  $f(z) = [3 \ 2 + z]$ , and

$$\Gamma^T = \begin{bmatrix} 1 & -3 \\ 0 & 1 \end{bmatrix}.$$

Suppose one chooses the desired coefficient vector  $\tilde{f}(z)$  to be

$$\tilde{f}(z) = [2 \ 1], \quad (5.3)$$

then

$$\begin{aligned} k(z) &= (\tilde{f}(z) - f(z))\Gamma^T[F|g]^{-1} \\ &= -\frac{(z-2)^2}{z(z+2)} [1 \ -(1+z)] \begin{bmatrix} 1 & -3 \\ 0 & 1 \end{bmatrix} \begin{bmatrix} z+2 & 0 \\ 2-z & 0 \\ 1 & z \\ 2-z & z-2 \end{bmatrix} \\ &= \left(\frac{z+2}{2}\right)^{-1} \left[ 2-z \ \frac{1}{2}(z-2)^2 \right] \in R_\delta^{1 \times 2} \end{aligned} \quad (5.4)$$

where  $w(z) = \frac{z+2}{2} \in S_\delta$  has been normalized, i.e.,  $w(0) = 1$ .

The desired compensator is

$$u(t) = -\left[ 2-z \ \frac{1}{2}(z-2)^2 \right] x(t) - \frac{1}{2} u(t-h) + v(t) + \frac{1}{2} v(t-h). \quad (5.5)$$

To save the delay elements used in (5.5), we use the second implementation scheme shown in Fig. 2 by rewriting (5.4) as

$$k(z) = [-2 \ z-6] + \frac{1}{(z+2)/2} [4 \ 8]$$

which leads to the following compensator structure:

$$u(t) = -[-2 \ z-6]x(t) + u_1(t),$$

where

$$u_1(t) = -[4 \ 8]x(t) - \frac{1}{2} u(t-h) + v(t) + v(t-h).$$

One may further seek the set of all possible coefficient vectors  $\tilde{f}(z)$  associated with the closed-loop system where  $k(z) \in R_\delta^{1 \times 2}$ . Observe that  $\Gamma^T[F|g]^{-1}$  has an irreducible factorization as

$$\Gamma^T[F|g]^{-1} = \begin{bmatrix} 1 & 1-z \\ z & 3z \end{bmatrix}^{-1} \begin{bmatrix} 0 & z-2 \\ z-2 & 0 \end{bmatrix} \equiv D^{-1}(z)N(z).$$

Therefore, the set of all possible vectors  $\tilde{f}(z)$  can be parameterized as

$$\tilde{f}(z) = [3 \ 2+z] + \tilde{h}_1(z)[1 \ 1-z] + \tilde{h}_2(z)[z \ 3z] \quad (5.6)$$

where  $\tilde{h}_1$  and  $\tilde{h}_2$  are "free" parameters in  $R_\delta$ . Notice that since the system  $(F, g)$  is not  $R_\delta$ -reachable, the set of all such coefficient vectors forms a proper submodule in  $R_\delta^{1 \times 2}$ . Also, it can easily be seen that the coefficient vector  $\tilde{f}$  given in (5.3) is in this set. Indeed if one chooses

$$\tilde{h}_1(z) = \frac{z-2}{z+2} \in R_\delta \text{ and } \tilde{h}_2(z) = -\frac{2}{z+2} \in R_\delta$$

then  $\tilde{f}(z) = [2 \ 1]$ .

ACKNOWLEDGMENT

The authors would like to thank the reviewer for the constructive remarks.

REFERENCES

- [1] E. D. Sontag, "Linear systems over commutative rings: A survey," *Ricerche di Automatica*, vol. 7, pp. 1-34, 1976.
- [2] E. W. Kamen, "Lectures on algebraic system theory: Linear systems over rings," NASA Contract. Rep. 3016, July 1978.
- [3] A. S. Morse, "Ring models for delay-differential systems," *Automatica*, vol. 12, pp. 529-531, 1976.
- [4] E. W. Kamen, "Linear systems with commensurate time delays: Stability and stabilization independent of delay," *IEEE Trans. Automat. Contr.*, vol. AC-27, pp. 367-375, 1982.
- [5] J. N. Chiasson and E. B. Lee, "Coefficient assignment by dynamic compensation for single input retarded delay systems," in *Proc. 23rd Conf. Decision Contr.*, pp. 864-868, 1984.
- [6] C. I. Byrnes, M. W. Spong, and T.-J. Tarn, "A several complex variables approach to feedback stabilization of linear neutral delay-differential systems," *Math. Syst. Theory*, vol. 17, pp. 97-133, 1984.
- [7] T. Kailath, *Linear Systems*. Englewood Cliffs, NJ: Prentice-Hall, 1980.
- [8] E. B. Lee and W.-S. Lu, "Coefficient assignability for linear systems with delays," *IEEE Trans. Automat. Contr.*, vol. AC-29, pp. 1048-1052, 1984.
- [9] W.-S. Lu, E. B. Lee, and S. H. Žak, "Finite dimensional compensator design for linear retarded system," in *Proc. 22nd Annual Allerton Conf. Commun. Contr. Comput.*, Monticello, IL, Oct. 3-5, 1984, pp. 615-624.

A Corrective Feedback Design for Nonlinear Systems with Fast Actuators

KHASHAYAR KHORASANI AND PETAR V. KOKOTOVIC

**Abstract**—Recent two-time-scale results can be derived from a geometric framework which allows further extensions and computational improvements. In this note the two-time scale behavior of singularly perturbed systems is exploited to design slow and fast controls and to combine them into a composite control. As an illustration, we present a corrective design for fast actuator dynamics modeled as singular perturbations.

Manuscript received March 18, 1985; revised July 3, 1985. Paper recommended by Associate Editor, M. G. Safonov. This work was supported in part by the Joint Services Electronics Program under Contract N00014-84-C-0149 and in part by the Illinois Office of Advanced Engineering Study.

The authors are with the Decision and Control Laboratory, Coordinated Science Laboratory and the Department of Electrical and Computer Engineering, University of Illinois, Urbana, IL 61801.

IEEE Log Number 8405758.