Return By Value Example 1

caller   callee

①

X   [   ]   tmp   [   ]
                            (object to return)

③

tmp. [   ]
(returned value)   ②

---

caller   callee
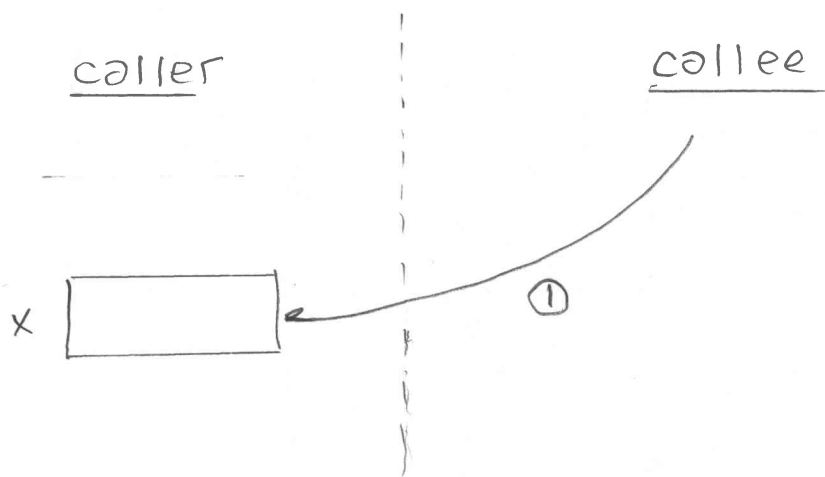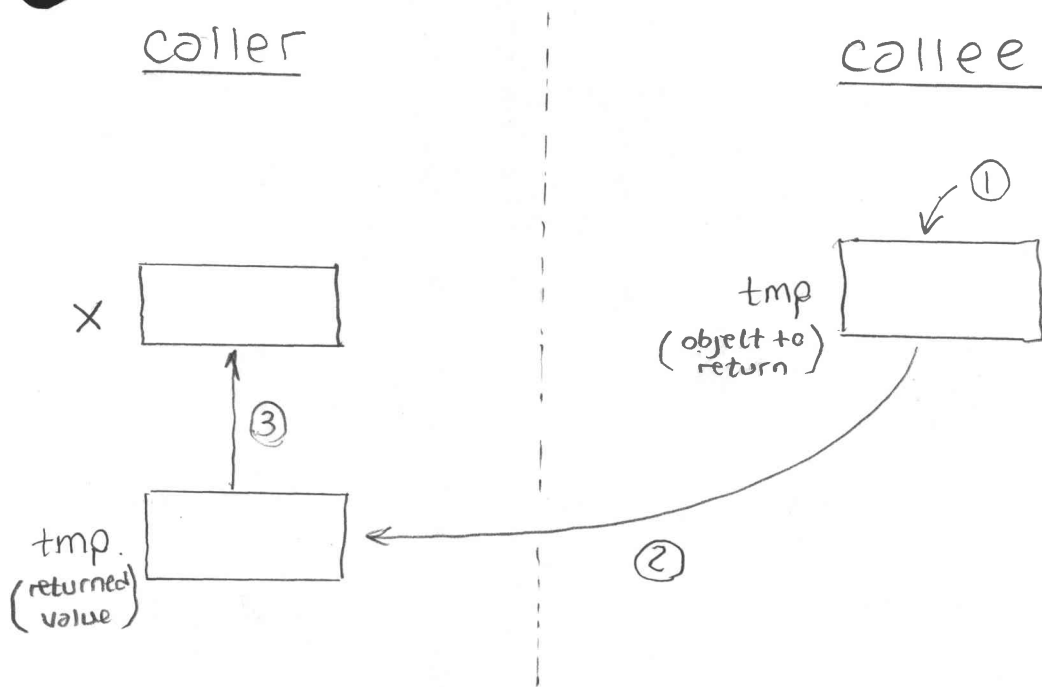
X   [   ]   ①   no copy/move

no temporaries

Michael Adams
University of Victoria